


# GetTechnologies



Light up your world with  
most energy efficient lighting solutions

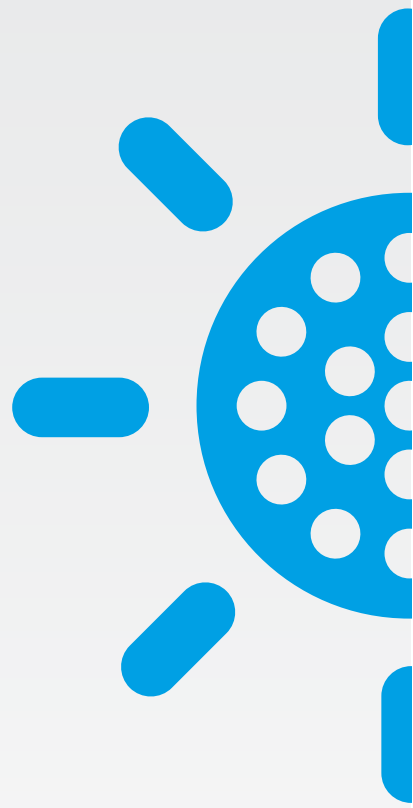

## GETPRO

Street Lights Series

# GetTechnologies

## Why GETPRO

Our range of GETPRO for road lightening is distinguished by excellent photometric and mechanical performance, as well as the care given to the quality of design. We offer a range of high performing products suitable for all category roads and various other lightening applications. GETPRO models are designed to cater for high ambient temperatures up to 50 centigrade long with surge protection and the longevity of our LED luminaire range.

Get Technologies is providing optimum commercial, industrial and residential lighting solutions with exceptional service and backup support. Get Technologies is an innovator and leader in LED lighting in Pakistan with highest international standards / certifications. Using state of the art GetTechnologies designs and produces the most advanced LED Lights & Fixtures in the market today.

We stand behind our products with substantial warranties, offers unmatched protection against the rigors of outdoor exposure. Get Technologies is committed to delivering the best solutions on the market, inspired by the needs of our customers and perfected by the knowledge and expertise of our engineers. We recognize the importance of beautiful energy-efficient lighting and aspire to improve every business with uncompromising performance and payback.



# Its time to LED your world!





# GetTechnologies

GETPRO 1



New generation energy saving long life & versatile LED roadway luminaire with high power LED as light source

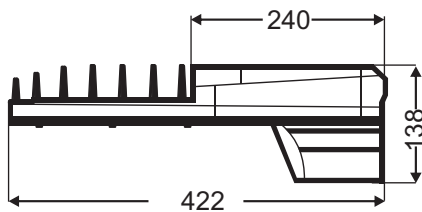


Ø 48-65



## Product Specifications

Product Specifications	
Housing	Aluminum Die cast housing with ambient heat dissipation design with IP66 and IK10 rating.
Finish	Gray painted housing
Light Source	High efficiency globally branded LEDs with Ra≥70 Nichia/Cree/ Samsung/Lumileds
Optics	IESNA Type I, II, III optics as per requirement using globally branded lenses
Control gear	Built-in high efficient electronic drivers-Meanwell Get Technologies , Phillips , Osram with Power Factor≥0.95, THD≤15%, Surge Protection≥10KVA, Plug & Play detachable connectors.
Mounting & Maintenance	48 to 65mm pole slide entry. Toolless opening of tray and control gear compartment.
Useful Life	>100000 hours @70 % lumen maintenance
Applications	Highways & Expressways, Main Roads, Parking Areas Commercial, Industrial and Residential streets.



Model	Power Consumption	Voltage Range	Power Factor	Colour Temp. (CCT)	LED Chip Luminous Efficiency Lm/ W	Weight
GETPRO-1	30-120 W	100 - 277 V	≥0.95	3000 - 6500 K	≥170	6.4 KG

Working Temperature: -40~+55 C





# GetTechnologies

## GETPRO 2



New generation energy saving long life & versatile LED roadway luminaire with high power LED as light source

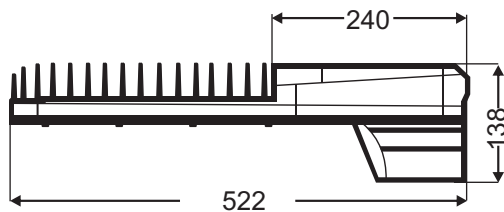


Ø 48-65



### Product Specifications

Product Specifications	
Housing	Aluminum Die cast housing with ambient heat dissipation design with IP66 and IK10 rating.
Finish	Gray painted housing
Light Source	High efficiency globally branded LEDs with Ra≥70 Nichia/Cree/ Samsung/Lumileds
Optics	IESNA Type I, II, III optics as per requirement using globally branded lenses
Control gear	Built-in high efficient electronic drivers-Meanwell Get Technologies , Phillips , Osram with Power Factor≥0.95, THD≤15%, Surge Protection≥10KVA, Plug & Play detachable connectors.
Mounting & Maintenance	48 to 65mm pole slide entry. Toolless opening of tray and control gear compartment.
Useful Life	>100000 hours @70 % lumen maintenance
Applications	Highways & Expressways, Main Roads, Parking Areas Commercial, Industrial and Residential streets.



Model	Power Consumption	Voltage Range	Power Factor	Colour Temp. (CCT)	LED Chip Luminous Efficiency Lm/ W	Weight
GETPRO-2	120-200 W	100 - 277 V	≥0.95	3000 - 6500 K	≥170	8.8 KG

Working Temperature: -40~+55 C



IP66

HPF







# GetTechnologies

## GETPRO 3



New generation energy saving long life & versatile LED roadway luminaire with high power LED as light source

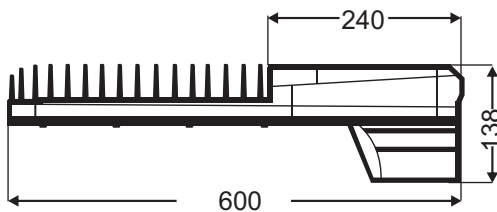


Ø 48-65



### Product Specifications

Product Specifications	
Housing	Aluminum Die cast housing with ambient heat dissipation design with IP66 and IK10 rating.
Finish	Gray painted housing
Light Source	High efficiency globally branded LEDs with Ra≥70 Nichia/Cree/ Samsung/Lumileds
Optics	IESNA Type I, II, III optics as per requirement using globally branded lenses
Control gear	Built-in high efficient electronic drivers-Meanwell Get Technologies , Phillips , Osram with Power Factor≥0.95, THD≤15%, Surge Protection≥10KVA, Plug & Play detachable connectors.
Mounting & Maintenance	48 to 65mm pole slide entry. Toolless opening of tray and control gear compartment.
Useful Life	>100000 hours @70 % lumen maintenance
Applications	Highways & Expressways, Main Roads, Parking Areas Commercial, Industrial and Residential streets.



Model	Power Consumption	Voltage Range	Power Factor	Colour Temp. (CCT)	LED Chip Luminous Efficiency Lm/ W	Weight
GETPRO-3	200-220 W	100 - 277 V	≥0.95	3000 - 6500 K	≥170	10.2 KG

Working Temperature: -40~+55 C



IP66

HPF





# GetTechnologies

## GETPRO 4



New generation energy saving long life & versatile LED roadway luminaire with high power LED as light source

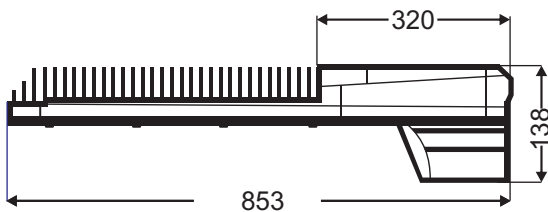


Ø 48-65



### Product Specifications

Product Specifications	
Housing	Aluminum Die cast housing with ambient heat dissipation design with IP66 and IK10 rating.
Finish	Gray painted housing
Light Source	High efficiency globally branded LEDs with Ra≥70 Nichia/Cree/ Samsung/Lumileds
Optics	IESNA Type I, II, III optics as per requirement using globally branded lenses
Control gear	Built-in high efficient electronic drivers-Meanwell Get Technologies , Phillips , Osram with Power Factor≥0.95, THD≤15%, Surge Protection≥10KVA, Plug & Play detachable connectors.
Mounting & Maintenance	48 to 65mm pole slide entry. Toolless opening of tray and control gear compartment.
Useful Life	>100000 hours @70 % lumen maintenance
Applications	Highways & Expressways, Main Roads, Parking Areas Commercial, Industrial and Residential streets.




Model	Power Consumption	Voltage Range	Power Factor	Colour Temp. (CCT)	LED Chip Luminous Efficiency Lm/ W	Weight
GETPRO-4	230-350 W	100 - 277 V	≥0.95	3000 - 6500 K	≥170	14.5 KG

Working Temperature: -40~+55 C



# GetTechnologies

## Accredited Certifications





*Pioneer of LED Lighting Technology in Pakistan*

# GetTechnologies<sup>TM</sup>

**Powering a Green Tomorrow**

**Get in Touch:**

0321-5959170, 0321-5959171

E-mail: [sales@getgroup.pk](mailto:sales@getgroup.pk)

Visit our website: [www.gtcree.com](http://www.gtcree.com)

24 KM Main Ferozepur Road, Kahna Nau, Lahore, Pakistan